Nanto

ELECTRIC WATER HEATER

Models 10 to 30
(Above and under sink)

Comfort

- Fast heating time
- Dedicated solution ensuring direct hot water availability

Durability

- Extended tank life thanks to O'Pro exclusive anti-corrosive protection
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

Installation

- Above and under sink versions available
- Easy installation with wall-mounting plate
- Visual product guide for simple installation on wall plates

Safe operation:

IP 24 - full compliance with European standards for electrical safety and user protection

Energy savings

- Eco and Absence modes to increase energy savings
- High-efficiency water inlet
- CFC-free high-density polyurethane insulation

User-friendly

- Front control knob for quick mode selection
- Heating and shower ready light indicator

1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability

2 Optimised stainless steel outlet pipe

3 High-density, 0% CFC polyurethane foam

4 **MAGNESIUM ANODE** for protection against corrosion

5 Copper heating element

6 Optimised Inlet diffuser



Video:

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Technical specifications

Model	Installation type	Output (W)	Voltage (V)	Heat-up time (Δt=50°C) (min)	Heat-up time (Δt=35°C) (min)	Energy consumption (kWh/24 h at 65°C)	ErP energy class	Profile
10	Above sink	2000	230 / 220-240*	18	12	0.48	A	XXS
10	Under sink	2000	230 / 220-240*	18	12	0.48	B	XXS
15	Above sink	2000	230 / 220-240*	27	18	0.58	A	XXS
15	Under sink	2000	230 / 220-240*	27	18	0.58	B	XXS
30	Above sink	2000	230 / 220-240*	53	37	0.84	C	S

Installation dimensions (mm)

Model	Inlet/outlet connections	Installation type	Dimensions (mm)						Flange opening (Ø) mm	Net weight (kg)
			A	B	C	D	E	F		
10	1/2''	Above sink	387	360	262	100	100	62	78	6.9
10	1/2''	Under sink	378	360	262	100	100	62	78	6.9
15	1/2''	Above sink	387	360	321	100	100	62	78	8.0
15	1/2''	Under sink	378	360	321	100	100	62	78	8.0
30	1/2''	Above sink	467	440	388	111	100	62	78	11.8

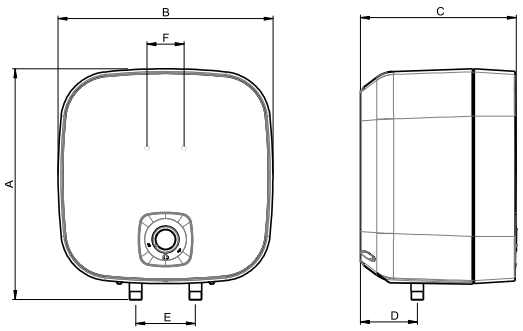

ABOVE SINK MODEL

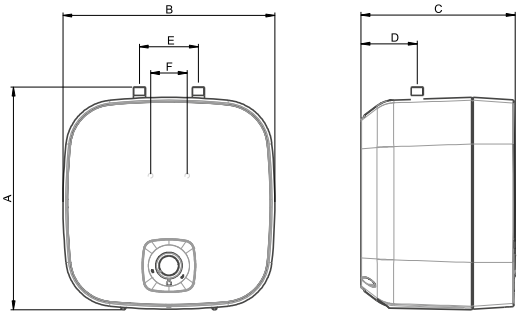

UNDER SINK MODEL

* Depending on models