Vertigo Steatite Wi-Fi

ELECTRIC WATER HEATER

Models 30 to 100
(Multi-position installation)

Video:

Comfort

- Fast heating thanks to double-tank structure
- Easy programming with quick mode selection
- Boost mode generates maximum heating for extra water needs
- Connectivity and remote control via the Cozytouch application

Durability

- Double-tank Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Double magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

Installation

- Easy installation with wall-mounting plates and drilling template
- Multi-position installation – vertical or horizontal position
- Space-saving with only 29cm depth

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection

Energy savings

- Eco+ self-learning mode to supply the right amount of hot water when needed
- Monitor water and electricity use with the Cozytouch application
- Absence mode: generates energy savings when away from home
- Accurate electronic thermostat for fully accurate temperature controls

User-friendly

- Ergonomic digital interface with heating indicator, operating modes and smart functions

1. **Wi-Fi connectivity**
2. **Waterdrop LED indicator:** amount of hot water ready to use
3. **Absence mode:** anti-frost position (7 °C)
4. **Manual mode:** required hot water amount selection
5. **Eco+ mode:** automatic operation based on consumers' daily habits
6. **QR code** for easy pairing with Cozytouch

1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability

2 High-density, 0% CFC polyurethane foam

3 **MAGNESIUM ANODE X2** for protection against corrosion

4 Inlet diffuser

5 Optimised stainless steel outlet pipes

6 **DIGITAL THERMOSTAT** for temperature control accuracy

Video:

Steatite x2 TECHNOLOGY

Dry Steatite heating element



Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.

Technical specifications

Model	Maximum power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time ΔT=50°C	Heat-up time: exit tank	Energy consumption (kWh/24 h at 65°C)	ErP energy class	Profile
30[1]	1000	1000	220-240	1h27	0h44	0.28	B	S
50[2]	2250	1000	220-240	1h46	0h33	0.69	B	M
80[3]	2250	1000	220-240	2h52	0h53	1.01	B	M
100[4]	2250	1000	220-240	3h32	1h05	1.11	B	M

Installation dimensions (mm)

Model	Dimensions (mm)				Net weight (kg)
	H	A	B	C	
30[1]	593	452	280	141	19.5
50[2]	766	609	500	157	24.5
80[3]	1090	973	700	117	32.5
100[4]	1301	1184	800	117	37.5

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L

CE EAC IP 24

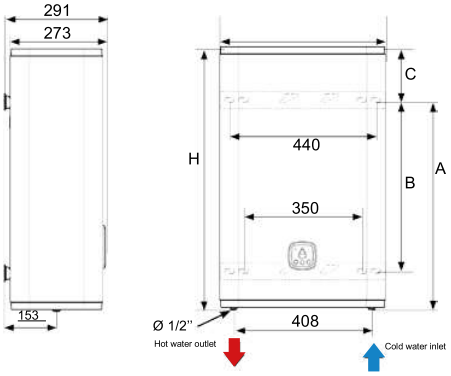

VERTICAL INSTALLATION

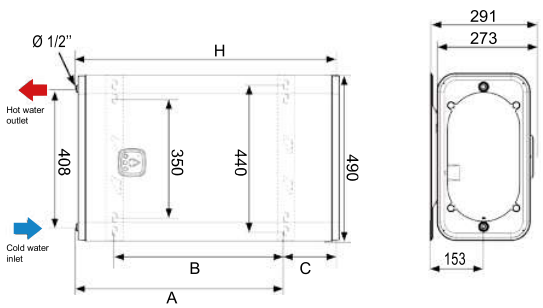

HORIZONTAL INSTALLATION